


MST Hub - DisplayPort to 3x HDMI

MSTDP123HD

DE: Bedienungsanleitung - de.startech.com
 FR: Guide de l'utilisateur - fr.startech.com
 ES: Guía del usuario - es.startech.com
 IT: Guida per l'uso - it.startech.com
 NL: Gebruiksaanwijzing - nl.startech.com
 PT: Guia do usuário - pt.startech.com

Product overview

Front View

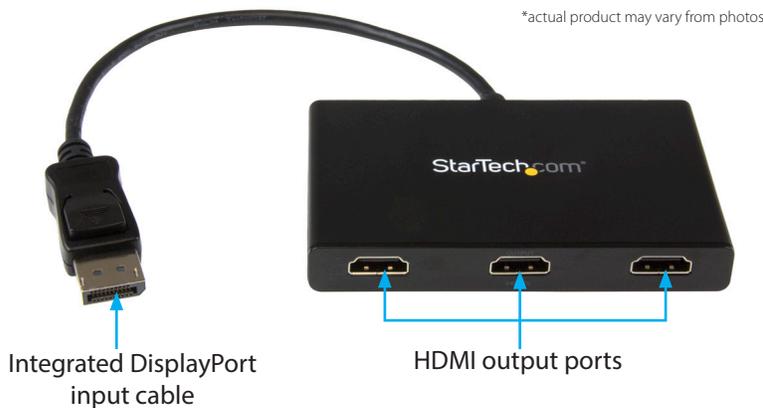

Rear View



Packaging contents

- 1x DisplayPort to 3x HDMI MST Hub
- 1x Universal power adapter (NA/EU/UK/AUS)
- 1x Quick install guide

System requirements

- DisplayPort 1.2 enabled computer
- Up to three displays with necessary cabling for HDMI support

Operating system requirements are subject to change. For the latest requirements, please visit www.startech.com/MSTDP123HD.

Important operation notes

Some computer systems may prevent this MST hub from displaying digitally encrypted content.

- A computer, laptop or tablet with DisplayPort 1.2 is required for MST support
- If your device only supports DisplayPort 1.1, the MST hub will act as a splitter, automatically mirroring your video source across all displays
- MST is certified for operation with Microsoft Windows 8 devices. Other operating systems may adopt the technology. Please check with your operating system vendor to confirm support. Operating system support is subject to change. For the latest requirements, please visit www.startech.com/MSTDP123HD
- After the MST hub is attached, it may be necessary to initiate operation of additional displays from within your Display settings
- The SCAN button resyncs all of the attached displays, and can be utilized if any of the displays are not detected
- Certain graphics adapters such as Intel based chip, have limited MST support and will only output to three displays in total. If you attach more than three displays, all of the displays beyond that number will be disabled, including integrated touch screens.
- MST shares 21.6 Gbps of bandwidth across all attached displays. Higher resolutions can restrict the bandwidth available for the remaining ports. Please see our guidelines below for determining the ideal resolution for your setup

Average resolution bandwidth allocation

- 1920x1080 (High-definition 1080p) @60hz – 22%
 - 1920x1200 @60hz – 30%
 - 2560x1440 @60hz – 35%
 - 2560x1600 @60hz – 38%
 - 3840 x 2160 (Ultra HD 4K) @30hz – 38%
- Note: Exceeding 100% will reduce functionality.

Examples of supported resolution configurations

Screen 1 resolution	Screen 2 resolution	Screen 3 resolution	Total % of bandwidth
1920x1200 @60hz (30%)	1920x1200 @60hz (30%)	1920x1200 @60hz (30%)	90%
2560x1440 @60hz (35%)	2560x1440 @60hz (35%)	1920x1200 @60hz (30%)	92%
2560x1600 @60hz (38%)	2560x1600 @60hz (38%)	1920x1080 @60hz (22%)	98%
3840x2160 @30hz (38%)	2560x1600 @60hz (38%)	1920x1080 @60hz (22%)	98%
3840x2160 @30hz (38%)	3840x2160 @30hz (38%)	1920x1080 @60hz (22%)	98%

Examples of unsupported resolution configurations

Screen 1 resolution	Screen 2 resolution	Screen 3 resolution	Total % of bandwidth
2560x1600 @60hz (38%)	2560x1600 @60hz (38%)	1920x1200 @60hz (30%)	106%
3840x2160 @30hz (38%)	2560x1600 @60hz (38%)	1920x1200 @60hz (30%)	106%
3840x2160 @30hz (38%)	2560x1600 @60hz (38%)	2560x1440 @60hz (35%)	111%
3840x2160 @30hz (38%)	3840x2160 @30hz (38%)	3840x2160 @30hz (38%)	114%

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.
Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.
CAN ICES-3 (B)/NMB-3(B)

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.
For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.
StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.